

SameDrift™ OHL

12¼ in. SameDrift™ HP Openhole Liner

Building on years of industry-proven solid expandable technology experience, Enventure’s SameDrift High Performance Openhole Liners are installed in the wellbore without loss of internal diameter (ID), providing the same drift as the casing string above the expanded liner.

Benefits


- ▶ Adds additional casing string without loss of ID
- ▶ Improved cementing for next casing string
- ▶ Enables drilling deeper wells
- ▶ Rotational capability assists in liner reaching setting depth

Features

- ▶ Provides a continuous 12¼ in. drift
- ▶ High-torque expandable connections
- ▶ Uses CLEAR™ expandable/retractable expansion cone

Installation requirements

- Minimum rig overpull during expansion
 - 150,000 lb
- Minimum pump pressure
 - 6,000 psi

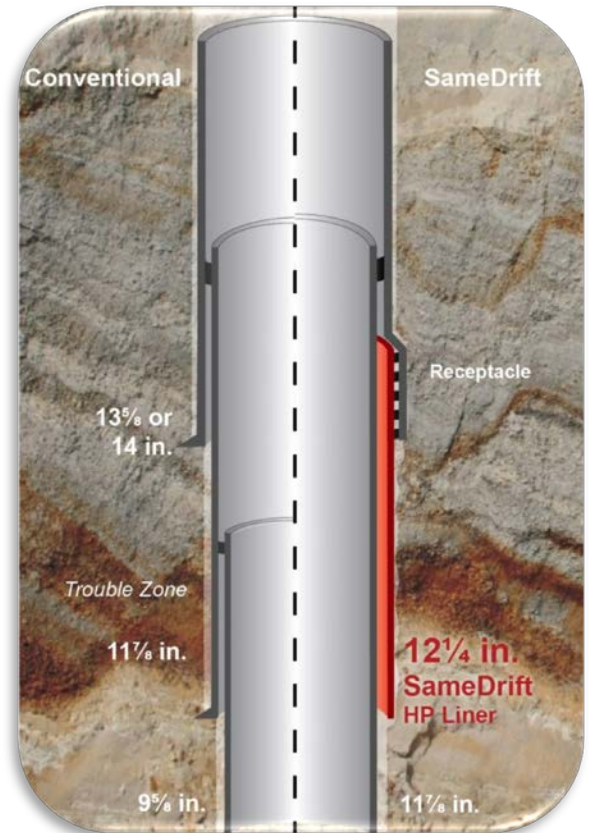

*Preliminary specifications			
Pre-Expansion		Post-Expansion	
Nominal Pipe OD	11.750 in.	Nominal Pipe OD	13.568 in.
Nominal Pipe ID	10.514 in.	Nominal Pipe ID	12.410 in.
Nominal Pipe Weight	74.6 lb/ft	Drift	12.250 in.
System RIH Diameter	12.050 in.	Dogleg Severity Limit	5 deg / 100 ft
Torque Limit @ Bottom	34,000 ft-lb	Internal Yield	6,140 psi
Dogleg Severity Limit	10 deg / 100 ft	Collapse	2,750 psi

Receptacle Specifications			
Receptacle Options (Flush-Flush Connection)	Max. OD while RIH	Internal Yield	Collapse
14-1/2 IN	14.500 in.	6,630 psi	1,250 psi
15 IN	15.000 in.	8,290 psi	2,760 psi

Enventure Global Technology

15995 North Barkers Landing, Suite 350 | Houston, Texas 77079
 Tel 281.552.2200 | Fax 281.552.2201 | www.EnventureGT.com